
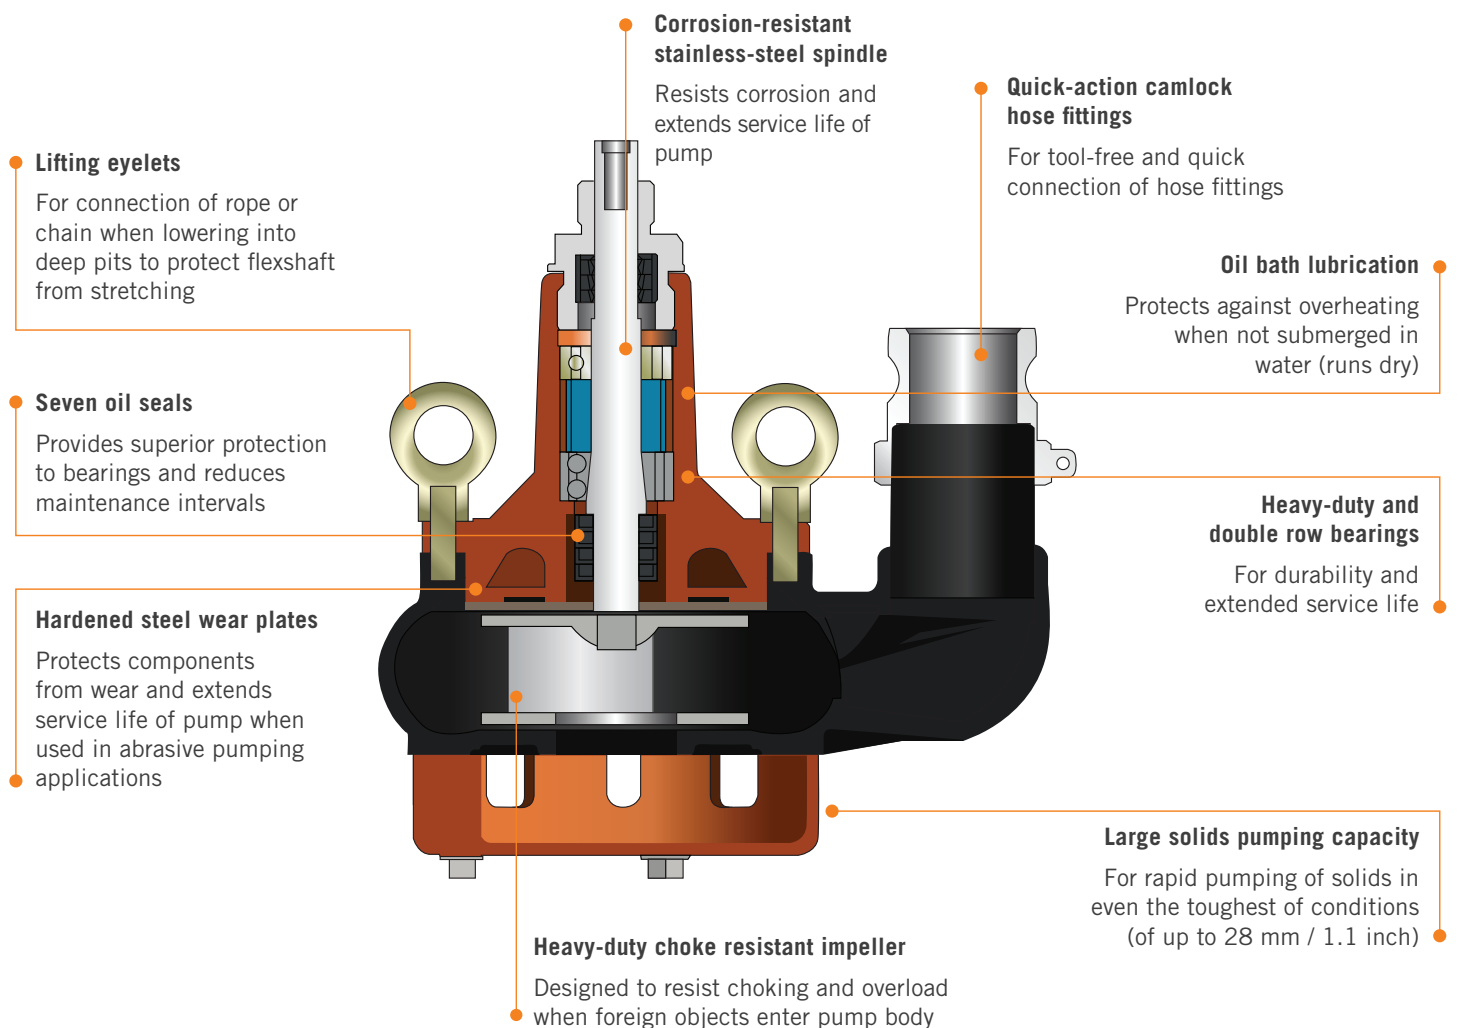


FLEXTOOL SUBMERSIBLE PUMPS FP212 SERIES

The Flextool FP212 series of flexible shaft submersible pumps set the benchmark for performance and durability.

Flextool pumps are highly efficient submersible units which are operated by petrol or diesel portable drive units. Flextool pumps are completely self-priming and extremely robust in their design. The flexible drive shaft facilitates use in many situations where close coupled pumps would not be suitable. The FP212 series come with 3 x 1 metre long flexshaft support springs which protect the drive shaft when operating over the sharp edge of excavations, pits, dams and other similar applications. Plus all pumps include an 8 metre support rope.

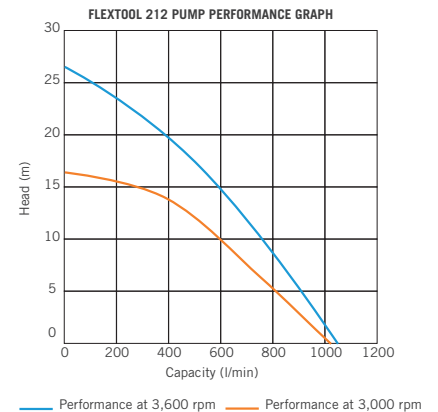

PRODUCT & PERFORMANCE SPECIFICATIONS



GENERAL PURPOSE PUMPS

APPLICATIONS

- Excavations pits
- Construction sites
- Pier holes
- Dams
- Swimming pools
- Trenches



Clean water



Water with debris



Model	Flexshaft Length m (ft)	Operating Weight kg (lb)	Shaft Core Diameter mm (in)	Shaft Casing Diameter mm (in)	Discharge Diameter mm (in)	Max Discharge Head m (ft)	Max Discharge L/h (gal/h)	Solids Capacity mm (in)	Product Code
FP212G-6	6 (19.7)	26.5 (58.4)	13 (0.5)	32 (1.3)	50 (2)	26 (85.3)	63,000 (16,642)	28 (1.1)	FT201801-UNIT
FP212G-9	9 (29.5)	38 (83.8)	13 (0.5)	32 (1.3)	50 (2)	26 (85.3)	63,000 (16,642)	28 (1.1)	FT201803-UNIT

ABRASION RESISTANT PUMPS

APPLICATIONS

- Quarries
- Sandy soils
- Sand pits
- Slurry



Slurry water with fine particles



Model	Flexshaft Length m (ft)	Operating Weight kg (lb)	Shaft Core Diameter mm (in)	Shaft Casing Diameter mm (in)	Discharge Diameter mm (in)	Max Discharge Head m (ft)	Max Discharge L/h (gal/h)	Solids Capacity mm (in)	Product Code
FP212A-6	6 (19.7)	34 (75)	15 (0.6)	38 (1.5)	50 (2)	26 (85.3)	63,000 (16,642)	28 (1.1)	FT201805-UNIT
FP212A-9	9 (29.5)	42.5 (93.7)	15 (0.6)	38 (1.5)	50 (2)	26 (85.3)	63,000 (16,642)	28 (1.1)	FT201818-UNIT

CHEMICAL RESISTANT PUMPS*

APPLICATIONS

- Anodisers
- Industrial waste
- Salty water
- Others



Other



Model	Flexshaft Length m (ft)	Operating Weight kg (lb)	Shaft Core Diameter mm (in)	Shaft Casing Diameter mm (in)	Discharge Diameter mm (in)	Max Discharge Head m (ft)	Max Discharge L/h (gal/h)	Solids Capacity mm (in)	Product Code
FP212C-6	6 (19.7)	37.5 (82.7)	15 (0.6)	38 (1.5)	50 (2)	26 (85.3)	63,000 (16,642)	28 (1.1)	FT201817-UNIT

*Improved chemical resistance to a wide range of chemicals compared to general purpose pumps.

ACCESSORIES

FLEXTOOL LAY FLAT HOSE

Hose Type	Hose Length m (ft)	Hose Diameter mm (in)	Fitted With	Product Code
Blue - Standard Duty	20 (65.6)	50 (2)	Coupling and Joiner	FT200032-UNIT



FLEXTOOL FLEXSHAFT EXTENSION

Model	Flexshaft Length m (ft)	Operating Weight kg (lb)	Shaft Inner Core Diameter mm (in)	Shaft Outer Casing Diameter mm (in)	Product Code
FES-2	6 (19.7)	20 (44)	13 (0.5)	32 (1.3)	FT201804-UNIT



This Technical Data Sheet (TDS) summarises our best knowledge of the product, based on the information available at the time. You should read this TDS carefully and consider the information in the context of how the product will be used. Our responsibility for products sold is subject to our standard terms and conditions of sale. Parchem does not accept any liability either directly or indirectly for any losses suffered in connection with the use of the product whether or not in accordance with any advice, specification, recommendation or information given by it.

Export product variations are only available for sale outside of Australia.

© This publication is copyright. All rights are reserved. Flextool is registered trade mark of Parchem Construction Supplies Pty Ltd.