

QUICK START GUIDE

SETTING UP YOUR SMITH PERFORMANCE SPRAYERS INDUSTRIAL CONCRETE SPRAYER S103E

1 Assemble hose to tank

IMPORTANT: Do not attempt to heat or alter hose or hose nut.

1. Align hose and screw on to tank. (See figure A).
2. Tighten with a 5/8" wrench. (See figure B).



Figure A



Figure B

2 Assemble wand to shut-off

Screw on wand assembly to shut-off using a 13/16" wrench.
(See figure C)

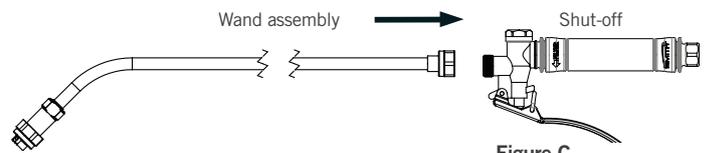



Figure C

3 Pump unlocking and pressurising

To unlock pump: Turn handle counterclockwise until 4-prong clamp is loose, then rotate clamp counterclockwise aligning the tabs with the slots in the neck of the tank and remove the pump.

To lock pump: Align clamp tabs with the slots in the neck of the tank and lower the pump assembly, rotate the 4-tab clamp clockwise to the stop position and rotate the handle clockwise to tighten, seal and lock the tank cover.

To pressurise: Push down on the handle to depress coil spring and turn handle 1/4 turn counterclockwise to unlock handle. Pressurise the sprayer by pumping the handle in a smooth up and down motion. Push down on the handle to depress coil spring and turn handle 1/4 turn clockwise, then allow handle to raise into lock position.

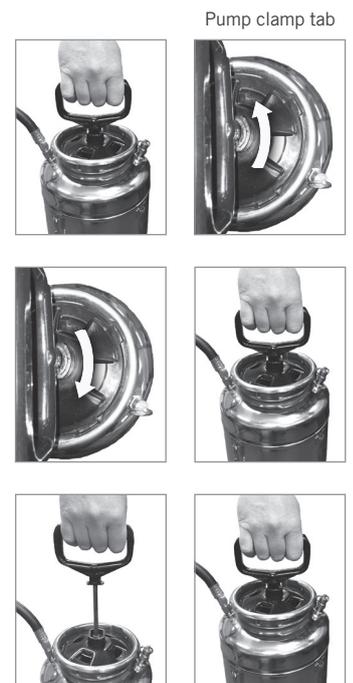

Flextool is a registered trade mark of Parchem Construction Supplies Pty Ltd. Smith Performance Sprayers is a trade mark.